

(7)

SIF 4040 Optics - Suggested solution.

22. may 2001

Problem #1.

a)

$$M_{VV'} = \begin{pmatrix} 1 & 0 \\ -\frac{1}{f_2} & 1 \end{pmatrix} \begin{pmatrix} 1 & t \\ 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 0 \\ -\frac{1}{f_1} & 1 \end{pmatrix}$$
$$= \begin{pmatrix} 1 - \frac{t}{f_1} & t \\ -(\frac{1}{f_1} + \frac{1}{f_2} - \frac{t}{f_1 f_2}) & 1 - \frac{t}{f_2} \end{pmatrix} = \begin{pmatrix} A & B \\ C & D \end{pmatrix}$$

$$f = -\frac{1}{C} = \frac{f_1 f_2}{f_1 + f_2 - t} = \underline{\underline{21.43 \text{ cm}}}$$

b)

Use ABCD-law: $d \rightarrow p$ yields
 $d' \rightarrow -\frac{A}{C} = f_A = \underline{\underline{0.2 \text{ cm}}}$ Back focal distance.


$$\text{Distance HV: } h = \frac{1-D}{C} = \frac{+t}{f_2 C} = \div t \frac{f}{f_2} = \underline{\underline{25.71 \text{ cm}}}$$

$$\text{Distance V'H': } h' = \frac{1-A}{C} = \frac{+t}{f_1 C} = \div t \frac{f}{f_1} = \underline{\underline{-17.14 \text{ cm}}}$$

(2)

~~Front focal distance~~FV: $f + h = \underline{47.14 \text{ cm}}$ Front focal distance.V'F': $f + h' = \underline{4.29 \text{ cm}}$. Back focal dist.Physical length: $f + h' + t = \underline{16.29 \text{ cm}}$

(Not a very good telephoto lens).

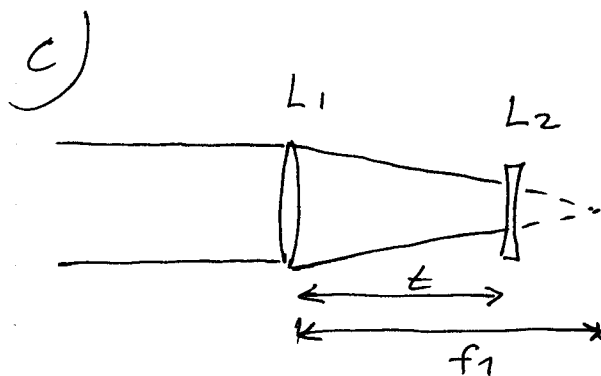

The ray bundle
of the object point
on axis is
focused by L_1

At L_2 it has a diameter D' given by:

$$\frac{D'}{f_1 - t} = \frac{D_1}{f_1} \Rightarrow D' = D_1 \left(1 - \frac{t}{f_1}\right) = 1 \text{ cm}$$

which is smaller than $D_2 = 1.5 \text{ cm}$


Therefore: L_1 is the aperture stop
 L_2 is the field stop.

(3)

The angular field of view is ~~the~~

$$\theta = \frac{D_2}{t} \frac{180}{\pi}$$

$$= \frac{1.5}{12} \frac{1800}{\pi} = \underline{\underline{7.17^\circ}}$$

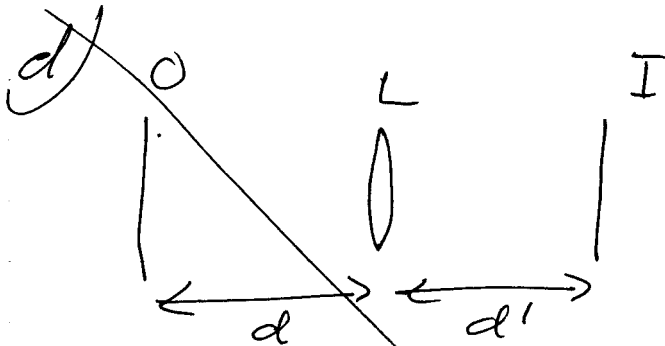

$$m = -\frac{d'}{d} = \text{given.}$$


$$\frac{1}{d} + \frac{1}{d'} = \frac{1}{f}$$

$$d' + d = L \Rightarrow d(1 -$$

$$\frac{1}{d'} \left(1 \mp m \right) = \frac{1}{f}$$

$$d' - \frac{d'}{m} = L \therefore d' = \frac{L}{1 - \frac{1}{m}}$$

(4)

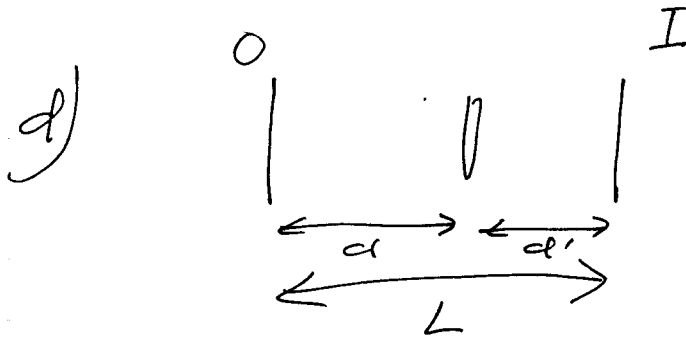

① $d + d' = L$ given = 1m given.

② $m = -\frac{d'}{d}$; ~~given~~ $|m|$ given = 4 given

③ $\frac{1}{d} + \frac{1}{d'} = \frac{1}{f}$; We seek d and f .

① & ② $\Rightarrow d = \frac{L}{1-m}$

since $d < L$ we must have $m < 0$,

i.e. $m = -|m|$. $\therefore d = \frac{L}{1+|m|} = \underline{\underline{20\text{cm}}}$.

$\Rightarrow \frac{1}{f} = \frac{1}{d} + \frac{1}{d'} = \frac{1}{d} \left(1 - \frac{1}{m}\right) = \frac{1}{d} \left(1 + \frac{1}{|m|}\right)$

$= \frac{1+|m|}{L} \frac{1+|m|}{|m|} \Rightarrow f = L \frac{|m|}{(1+|m|)^2} = \frac{4m}{25} = \underline{\underline{16\text{cm}}}$

(5)

Problem #2.

$$a) \quad \lambda_m = \frac{2L}{m} \approx 633 \text{ nm}, \text{ ~~Ans.~~$$

$$m \approx \frac{2L}{633 \text{ nm}} \approx 9.48 \cdot 10^5 \sim 10^6.$$

$$\Delta\lambda = \lambda_m - \lambda_{m+1} = \frac{2L}{m} - \frac{2L}{m+1} = 2L/m(m+1)$$

$$\approx \frac{2L}{m^2} \quad ; \quad m = \frac{2L}{\Delta\lambda} \Rightarrow$$

$$\Delta\lambda \approx \frac{\lambda^2}{2L} \quad QED$$

$$\Delta\lambda = \frac{633^2}{2L} = 0.6678 \cdot 10^{-12} \text{ m}$$

$$\lambda\nu = c \Rightarrow \lambda\Delta\nu + \nu\Delta\lambda = 0 \Rightarrow$$

$$|\Delta\nu| = \nu \frac{\Delta\lambda}{\lambda} = c \frac{\Delta\lambda}{\lambda^2} = \frac{c}{2L} = \underline{\underline{5014 \text{ Hz}}}$$

(6)

b) Resulting intensity


$$\begin{aligned}
 I &= I_0(1 + \cos k_1 s + 1 + \cos k_2 s) \\
 &= I_0 \left(2 + 2\cos\left(\frac{k_1 + k_2}{2}s\right)\cos\left(\frac{k_1 - k_2}{2}s\right) \right) \\
 &\approx 2I_0 \left(1 + \cos\left(\frac{k_1 + k_2}{2}s\right)\cos\left(\frac{k_1 - k_2}{2}s\right) \right)
 \end{aligned}$$

$$k_1 = 2\pi/\lambda_1, \quad k_2 = 2\pi/\lambda_2$$

$$\frac{k_1 - k_2}{2} = \pi \left(\frac{1}{\lambda_1} - \frac{1}{\lambda_2} \right) = \pi \frac{\lambda_2 - \lambda_1}{\lambda_1 \lambda_2} \approx \pi \frac{\Delta\lambda}{\lambda^2}$$

$$\frac{k_1 + k_2}{2} = \pi \left(\frac{1}{\lambda_1} + \frac{1}{\lambda_2} \right) = \pi \frac{\lambda_1 + \lambda_2}{\lambda_1 \lambda_2} \approx \pi \frac{2\lambda}{\lambda^2} = 2\pi/\lambda$$

$$I = 2I_0 \left(1 + \cos\left(\frac{2\pi s}{\lambda}\right)\cos\left(\pi \frac{\Delta\lambda}{\lambda^2} s\right) \right) \quad \text{QED.}$$

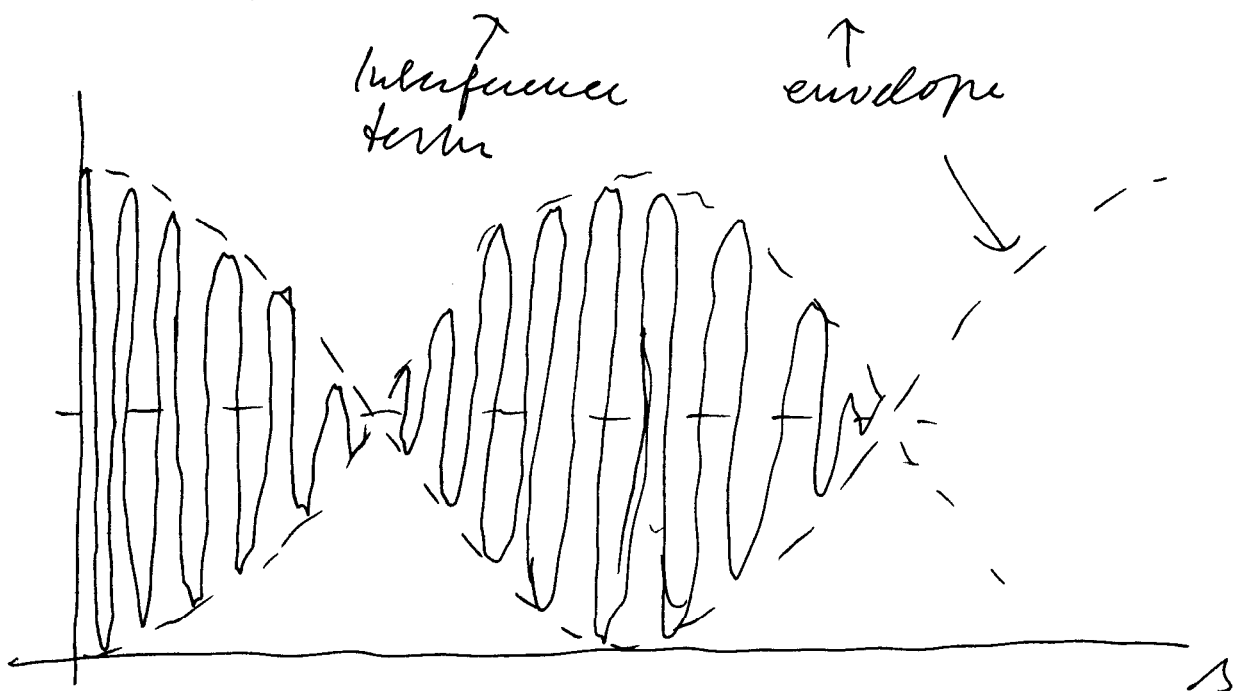

(7)

c) Interference term vanishes for
 $\cos(\pi \frac{\Delta\lambda}{\lambda^2} s) = 0$, i.e. for $\frac{\Delta\lambda}{\lambda^2} s = m + \frac{1}{2}$
 $m = 0, \pm 1$ etc.
 $s = (m + \frac{1}{2}) \frac{\lambda^2}{\Delta\lambda} = \underline{(2m+1)L}$ an odd multiple of L

Maximum interference for
 $\cos(\pi \frac{\Delta\lambda}{\lambda^2} s) = \pm 1$, i.e. for $\frac{\Delta\lambda}{\lambda^2} s = m$, $m = 0, \pm 1, \dots$
 $s = m \frac{\lambda^2}{\Delta\lambda} = \underline{2mL}$ Even multiples of L.

d)
$$\left. \begin{aligned} I_{\max} &\sim 1 + |\cos(\pi \frac{\Delta\lambda}{\lambda^2} s)| \\ I_{\min} &\sim 1 - |\cos(\pi \frac{\Delta\lambda}{\lambda^2} s)| \end{aligned} \right\} \rightarrow$$

$$V(s) = |\cos(\pi \frac{\Delta\lambda}{\lambda^2} s)| = |\cos(\pi \frac{s}{2L})|$$


$V \geq 0.5$ for $|\cos(\pi \frac{s}{2L})| \geq 0.5$

$$\frac{\pi s}{2L} = m \pm \frac{\pi}{3} \Rightarrow \underline{\underline{s = m2L \pm \frac{2}{3}L}}, m = 0, \pm 1, \dots$$

$(\cos \frac{\pi}{3} = 0.5)$



Problem #3.

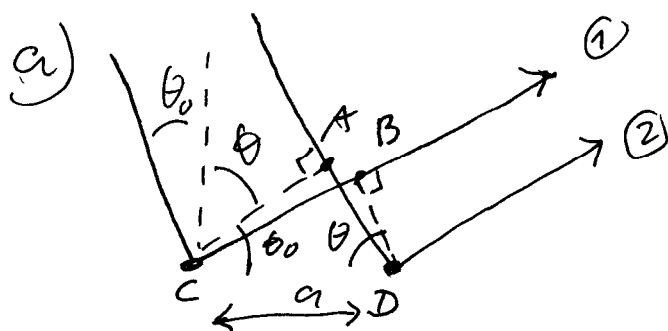

$$\Delta = CB - AD = a \sin \theta - a \sin \theta_0 = a (\sin \theta - \sin \theta_0) \quad (Q.E.D.)$$

b) $\Delta = m \lambda$; $m = 0, \pm 1, \pm 2 \dots \Rightarrow$


$$a (\sin \theta_m - \sin \theta_0) = m \lambda$$

$$a \left(\frac{1}{\sqrt{1 + \frac{h_m^2}{L^2}}} - \frac{1}{\sqrt{1 + \frac{h_0^2}{L^2}}} \right) = m \lambda.$$

(*) Given formula wrong^{*)}: Full credit for any answer here. *) but a few approximations.

c) $m_1 \lambda = -a \sin \theta_0$
 $m_2 \lambda = a (\sin \theta - \sin \theta_0)$

$$m_2 - m_1 = \frac{a}{\lambda} \sin \theta = \frac{a}{\lambda} \sin \phi$$

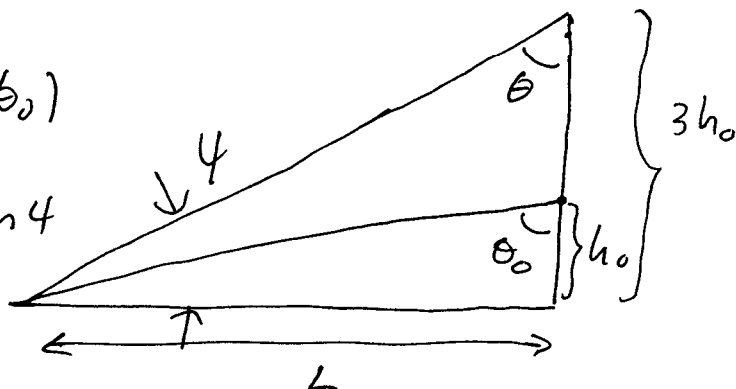

$$-m_1 = \ln \left(\frac{a}{\lambda} \sin \theta_0 \right) =$$

$$m_2 = \ln \left(\frac{a}{\lambda} (\sin \theta - \sin \theta_0) \right) =$$

(9)

d)

$$E(x, y, 0) = \frac{1}{2} \left[1 + \frac{1}{2} \left(e^{i 2\pi \frac{x}{a}} + e^{-i 2\pi \frac{x}{a}} \right) \right] A e^{ikz}$$

$$E(x, y, z) = \frac{1}{2} A e^{ikz} + \frac{1}{4} A e^{i \left(2\pi \frac{x}{a} + z \sqrt{k^2 - (2\pi/a)^2} \right)} + \frac{1}{4} A e^{i \left(-2\pi \frac{x}{a} + z \sqrt{k^2 - (2\pi/a)^2} \right)}$$

Sum of 3 plane waves:

$$k = 2\pi/\lambda$$

$$\sqrt{k^2 - (2\pi/a)^2} = 2\pi \sqrt{\frac{1}{\lambda^2} - \frac{1}{a^2}} = 2\pi i \sqrt{\frac{1}{a^2} - \frac{1}{\lambda^2}}$$

for $a < \lambda$.

$$\Rightarrow E(x, y, z) = \frac{A}{2} e^{ikz} + \frac{A}{2} \cos\left(2\pi \frac{x}{a}\right) e^{-2\pi z \sqrt{\frac{1}{a^2} - \frac{1}{\lambda^2}}}$$

Exponential

damping in z -dir.

Only this term
will contribute for
large z .